

POLARIS C

High performance **Hand-held meters**



INTRODUCING OUR NEW POLARIS C LINE

- Polaris C features for all hand-held meters
- Rechargeable battery (USB-C)
- Easy probe exchange for simple self-repairs (to same probe type)

STANDARD POLARIS C FEATURES FOR METERS

- · Waterproof, sturdy and long-lasting
- Instant and reliable measurements for easy daily use
- Bluetooth and NFC compatible for easy data transfer
- · Cobália integration and tagging functions
- 2-year product warranty when registered in Cobália

A LARGE VARIETY **OF PROBES AVAILABLE FOR THE** POLARIS C METER























ATMOSPHERE



WHY USE **HAND-HELD METERS?**

Take spot measurements across various locations to get a clear understanding of water conditions, enabling you to make quick adjustments to water quality.

GAIN ACCURATE RESULTS

- Our hand-held meters make monitoring of the parameters quick, easy and accessible, right at your hand.
- The Polaris C is designed to be used in aquaculture, research, wastewater treatment and other industries that need to have trustworthy results right away.
- Hand-held meters are waterproof, sturdy and can withstand the tough conditions in everyday use. They are built to last.



TAGS

Identify fish tanks or users with unique tags on your Polaris C. Easily store or upload saved data to Cobália.



COBÁLIA COMPATIBLE

All Polaris C devices are integrated with our digital farm management platform, Cobália. Cobália Basic is available free of charge, providing access to software updates, live data, and more.



EASY TRANSFER

You can transfer data from your Polaris C to Cobália via Cobalia Sync App.



Download Cobália Sync app


To see and upload measurements from your smartphone!

Available in Google Play & App store



LET'S **BUILD CLEVER FARMS**

Optimize your farm operations by integrating everything into Cobália to create your digital farm.

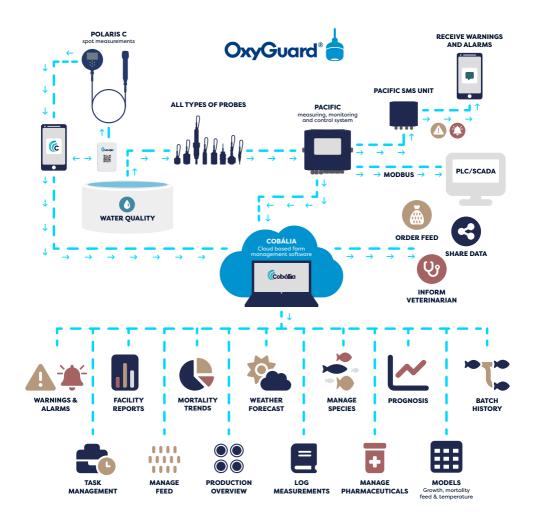





OxyGuard International A/S Farum Gydevej 64 3520 Farum, Denmark



www.oxyguard.com Phone: +45 4582 2094 WhatsApp: +45 2330 2094 oxyguard@oxyguard.com

